


acar P7 RJ

Surge protective power strip
+ surge protection for ADSL terminal equipment



- 7 SOCKET OUTLETS
5 WITH EARTHING PIN**
- SURGE PROTECTION
FOR ADSL LINE**
- SOCKET OUTLETS
SAFE FOR CHILDREN**
- ILLUMINATED DOUBLE
POLE MAINS SWITCH**
- 2 AVAILABLE
COLOUR VARIANTS**
- AUTOMATIC
FUSE**
- SURGE
PROTECTION**
- CABLE
MANAGEMENT SYSTEM**
- AVAILABLE CABLE
LENGTHS: 1.5m, 3m, 5m**

acar P7 RJ is a device similar to the model **acar P7 NET**, but unlike the latter, it provides surge protection of ADSL terminal appliances. It is provided with protected RJ11 jacks as standard phone ports. As well as protecting seven socket outlets 230V (including 5 with an earthing pin) it also allows to connect and protect standard telephone, fax or ADSL modem. **acar P7 RJ** is particularly recommended in areas where telephone line is supplied to the building by means of overhead wires, notably exposed to electric charges generated in the atmosphere.

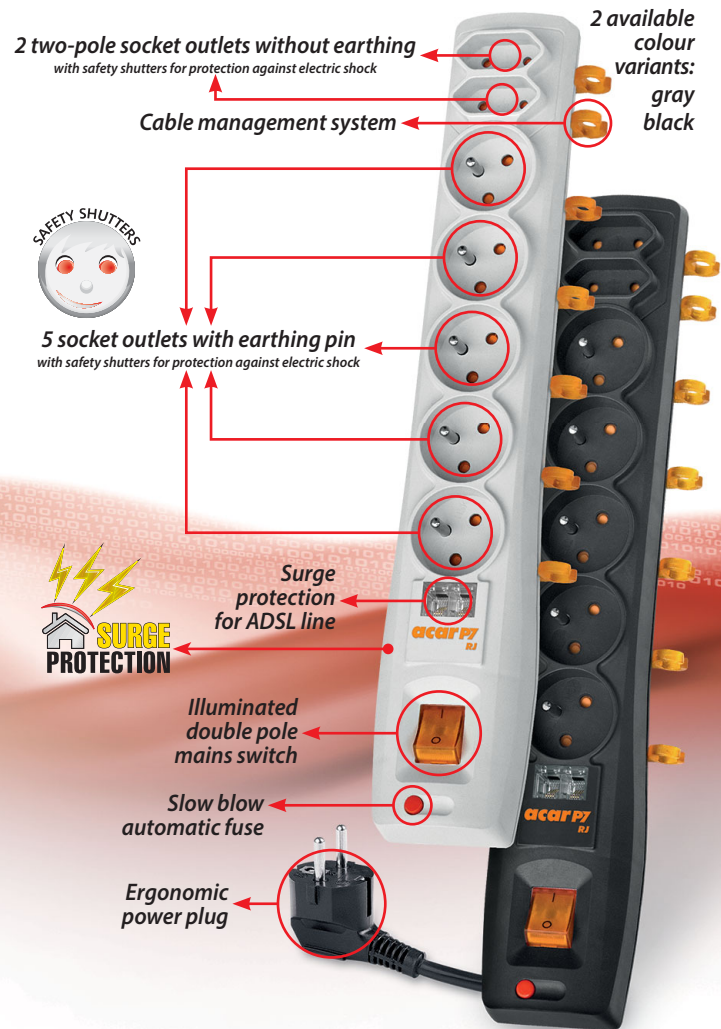


Technical data: acar P7 RJ

Power side:

Maximum load	P _{MAX} 2300W
Nominal voltage U _N	230V
Nominal frequency	50Hz
Nominal load current	ΣI _N = 10A MAX
Surge protection response time	<25ns
Maximum voltage U _C	250V 50Hz
Protection level U _P	≤1.3kV
Nominal discharge current i _N	2kA (L/N) – 8/20µs
Maximum discharge current i _{MAX}	6.5kA (L/N) – 8/20µs
Fuses	1 automatic fuse, slow blow 10A/250V
Anti-shock protection system	earthing pins connected to the protective earthing conductor
Number of socket outlets	5 two-pole socket outlets with earthing pin, 10A/250V 2 two-pole socket outlets without earthing, 2.5A/250V
Switch	illuminated double pole mains switch
Housing	made of self-extinguishing plastic
Dimensions	370x65x44mm
Weight	0.48kg

ADSL side:


Maximum voltage U _C	150V
Protection level U _P	≤1kV (L _{a,b} /PE)
Nominal discharge current i _N	2kA (L _{a,b} /PE) – 8/20µs
Maximum discharge current i _{MAX}	5kA (L _{a,b} /PE) – 8/20µs
Surge protection response time	<100ns
Protected lines	2 out of 4
Type of sockets	RJ11 (6P4C)



ILLUMINATED DOUBLE POLE MAINS SWITCH AND SLOW-BLOW AUTOMATIC FUSE



SURGE PROTECTION FOR TELEPHONE (ADSL) CONNECTION, ADSL CABLE INCLUDED



5 SOCKET OUTLETS 10A WITH EARTHING PIN, 2 UNEARTHED EURO SOCKETS, ALL OF THEM WITH SAFETY SHUTTERS



USAGE OF THE CABLE MANAGEMENT SYSTEM

The manufacturer reserves the right to change the technical parameters of the device, resulting from technological progress. ATTENTION! The technical data define the maximum values of surges against which the device protects.