


## acar S8 plus

Surge protective power strip + enhanced surge energy absorption + surge protection indicator

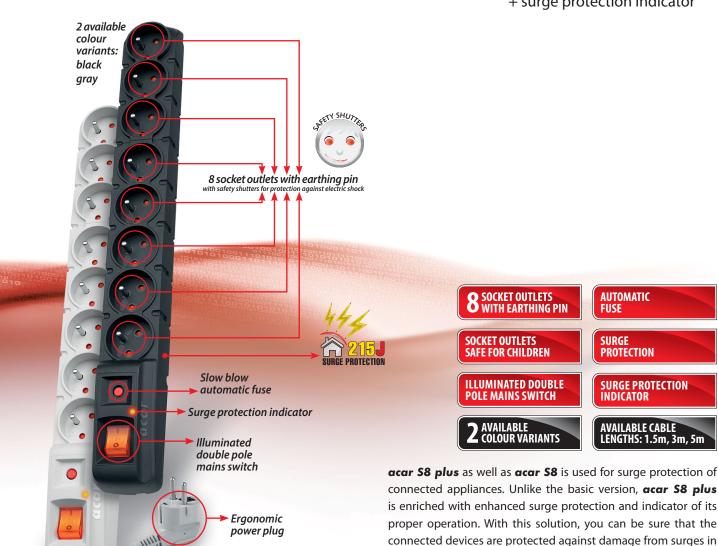

ILLUMINATED DOUBLE POLE MAINS SWITCH, SLOW-BLOW AUTOMAT-IC FUSE, SURGE PRO-TECTION INDICATOR

8 SOCKET OUTLETS 10A WITH EARTHING PIN AND SAFETY SHUTTERS

FOUR POSSIBLE WAYS OF POWER CABLE ROUTING AND OPTIONAL MOUNTING BRACKETS



VARISTOR

**⇔TDK** 

MADE IN

POLAND



## Technical data: **acar S8 plus**

Maximum load	P <sub>MAX</sub> 2300W
Nominal voltage U <sub>N</sub>	230V
Nominal frequency	50Hz
Nominal load current	$\Sigma I_N = 10A MAX$
Surge protection response time	<25ns
Maximum voltage U <sub>C</sub>	250V 50Hz
Protection level U <sub>P</sub>	≤1.3kV
Nominal discharge current i <sub>N</sub>	2kA (L/N) – 8/20μs
Maximum discharge current i <sub>MAX</sub>	10kA (L/N) – 8/20µs (type 2)
Fuses	1 automatic fuse, slow blow 10A/250V
Anti-shock protection system	earthing pins connected to the protective earthing conductor
Number of socket outlets	8 two-pole socket outlets with earthing pin, 10A/250V
Switch	illuminated double pole mains switch
Housing	made of self-extinguishing plastic
Dimensions	445x54x55mm
Weight	0.48kg

optional and available from the distributor.

the power lines. Eight socket outlets allow for effective protection of multiple appliances with just one power strip. **acar S8 plus** is applicable both at home and in the office, and its high quality has been confirmed by 5-year warranty. Mounting brackets are

The manufacturer reserves the right to change the technical parameters of the device, resulting from technological progress. ATTENTION! The technical data define the maximum values of surges against which the device protects.