


acar S10

Surge protective power strip







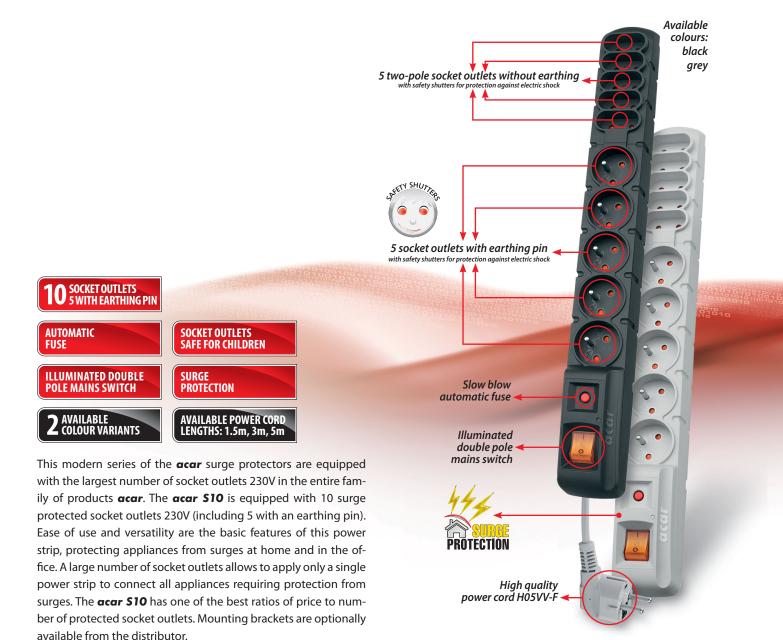

Technical data: acar \$10

Maximum load	P _{MAX} 2300W
Nominal voltage U _N	230V
Nominal frequency	50Hz
Nominal load current	$\Sigma I_N = 10A \text{ MAX}$
Surge protection response time	<25ns
Maximum voltage U _C	250V 50Hz
Protection level U _P	≤1.3kV
Nominal discharge current i _N	2kA (L/N) – 8/20μs
Maximum discharge current i _{MAX}	6.5kA (L/N) – 8/20μs
Fuses	1 automatic fuse, slow blow 10A/250V
Anti-shock protection system	earthing pins connected to the protective earthing conductor
Number of socket outlets	5 two-pole socket outlets with earthing pin, 10A/250V 5 two-pole socket outlets without earthing, 2.5A/250V
Switch	illuminated double pole mains switch
Housing	made of self-extinguishing plastic
Dimensions	445x54x55mm
Weight	0.48kg

ILLUMINATED DOUBLE POLE MAINS SWITCH AND SLOW-BLOW **AUTOMATIC FUSE**



5 SOCKET OUTLETS 10A WITH EARTHING PIN, **5 UNEARTHED EURO** SOCKETS, ALL OF THEM WITH SAFETY SHUTTERS



FOUR POSSIBLE WAYS OF POWER CABLE ROUTING AND **OPTIONAL MOUNTING BRACKETS**

The manufacturer reserves the right to change the technical parameters of the device, resulting from technological progress. ATTENTION! The technical data define the maximum values of surges against which the device protects.