



acar

X5


cable organizer

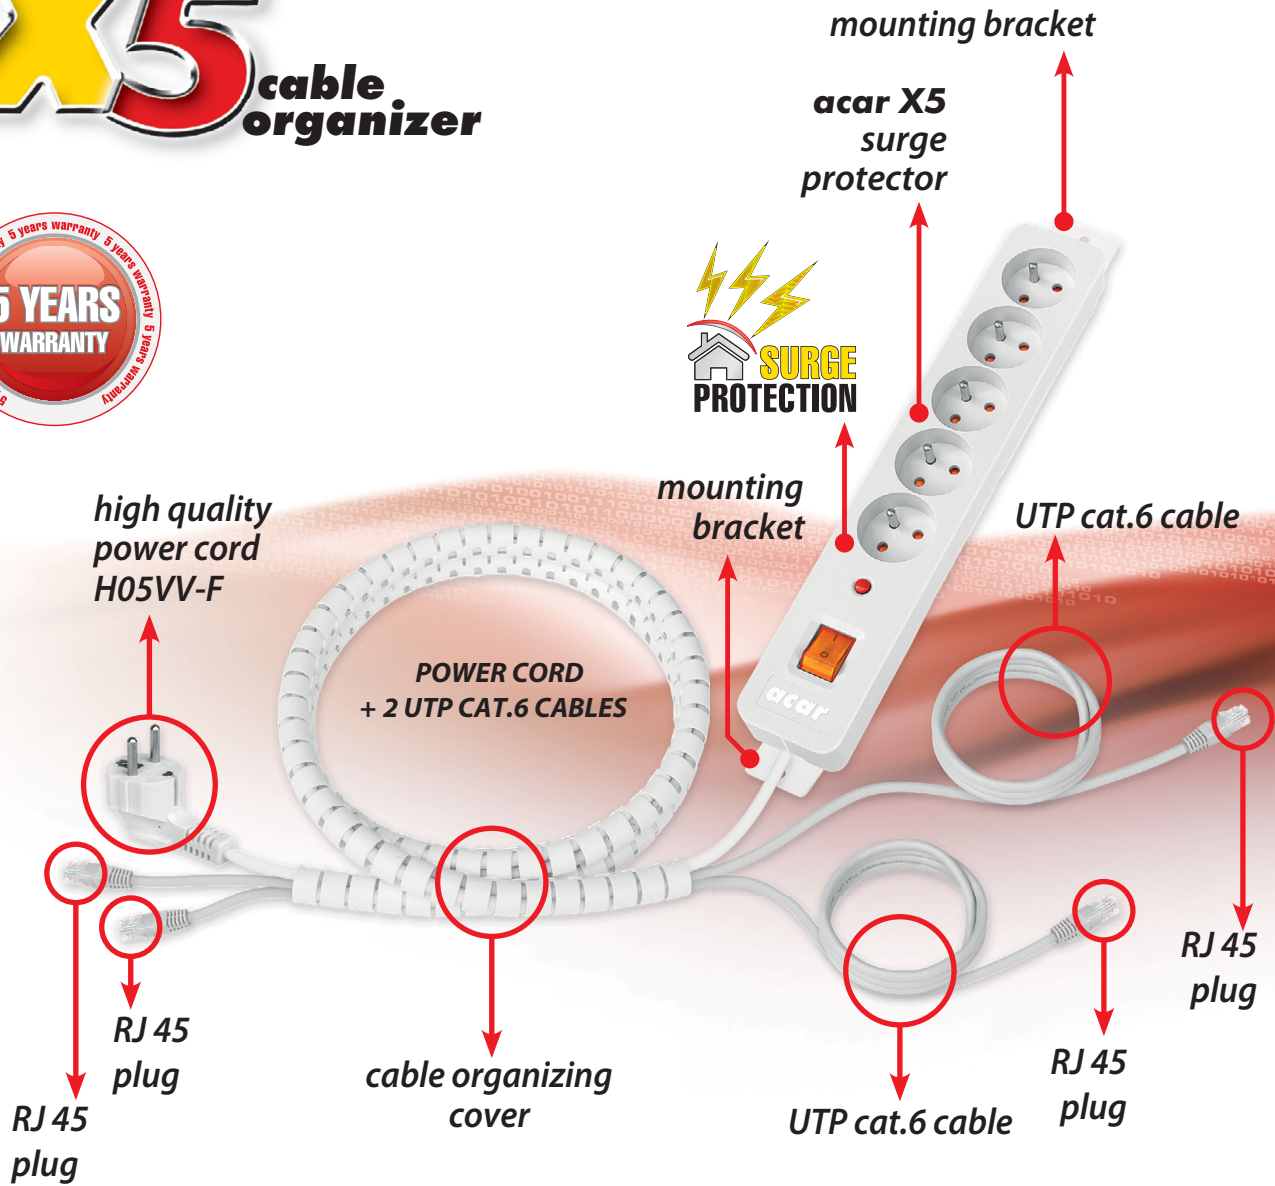

POWER CORD
+ 1 UTP CAT.6 CABLE
+ 1 TELEPHONE CABLE

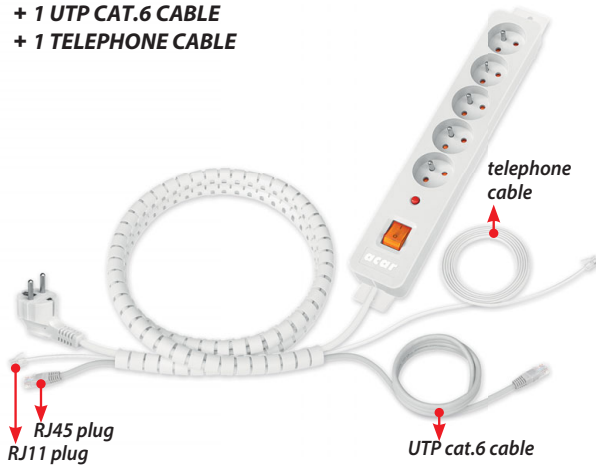

POWER CORD
+ 1 UTP CAT.6 CABLE

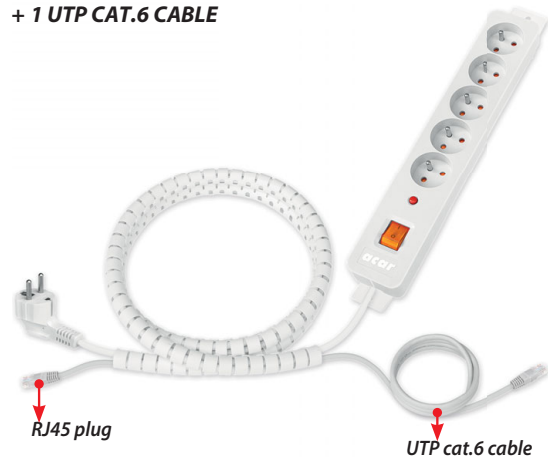




acar X5 cable organizer

Surge protective power strip
+ cable organizing cover

SIGNAL CABLES CONFIGURATIONS
AVAILABLE ON CUSTOMER'S REQUEST

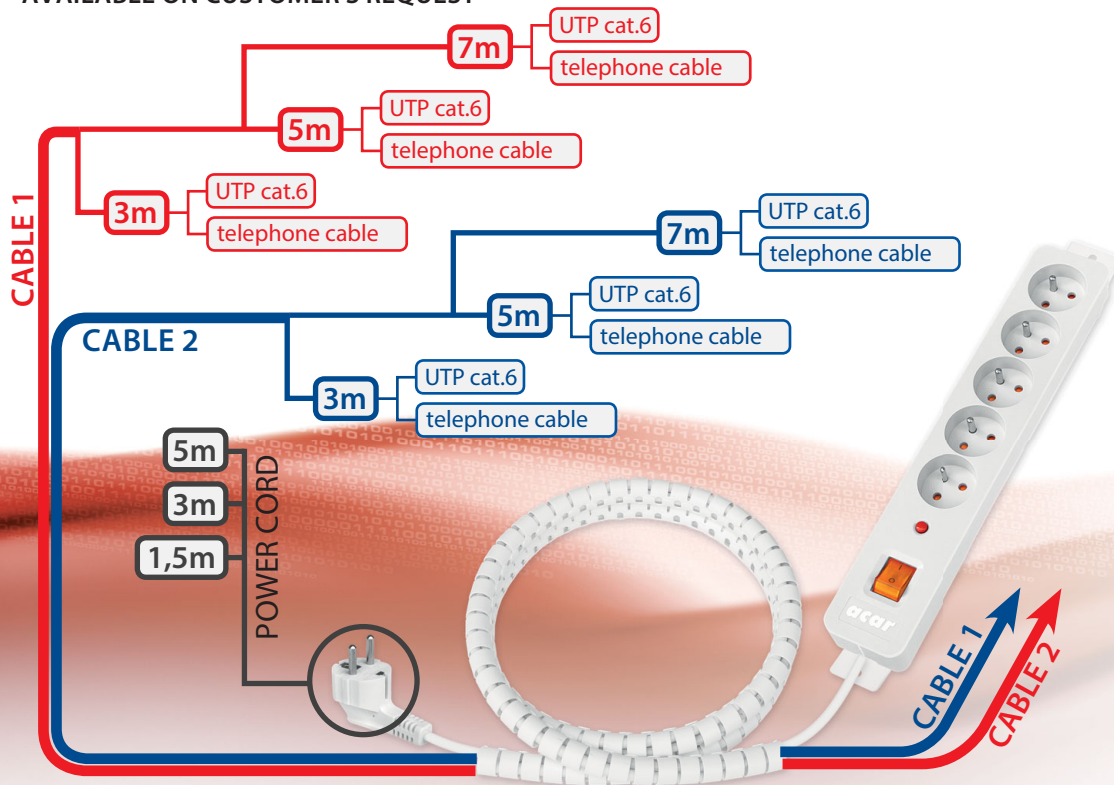

5 SOCKET OUTLETS
WITH EARTHING PIN

CABLE ORGANIZING
COVER

SIGNAL CABLES
INCLUDED

AVAILABLE CABLE
LENGTHS: 1.5m, 3m, 5m

AVAILABLE SIGNAL CABLE
LENGTHS: 3m / 5m / 7m

5 SOCKETS 10A
WITH EARTHING
PIN AND SAFETY
SHUTTERS



CABLE
ORGANIZING
COVER



UTP CAT.6 CABLE



TELEPHONE
CABLE



FOUR POSSIBLE
WAYS OF POWER
CABLE ROUTING AND
OPTIONAL MOUNTING
BRACKETS



The **acar X5 cable organizer**, one of the latest surge protective device from the **acar** product range, is equipped with a cable cover that allows the power cord to be routed together with additional signal cables. Thanks to the cable cover, the **acar X5 cable organizer** helps to bring order to the cables being routed to such appliances as: computer, monitor, TV set, projector, home theater. The cable cover adapts to the cables being routed, fastening them into one, aesthetic cable harness. Various available lengths of the cable cover allow you to organize cables for almost any configuration of appliances. Proven, reliable solutions and a modern design allow for granting a 5-year warranty for the device. The use of an automatic fuse ensures virtually maintenance-free operation. The **acar X5 cable organizers** are available only on request.

Technical data: **acar X5 cable organizer**

Maximum load	P_{MAX} 2300W
Nominal voltage U_N	230V
Nominal frequency	50Hz
Nominal load current	$\Sigma I_N = 10A$ MAX
Surge protection response time	<25ns
Maximum voltage U_C	250V 50Hz
Protection level U_p	$\leq 1,3kV$
Nominal discharge current i_N	2kA (L/N) – 8/20 μs
Maximum discharge current i_{MAX}	6,5kA (L/N) – 8/20 μs
Fuses	1 automatic fuse, slow blow 10A/250V
Anti-shock protection system	earthing pins connected to the protective earthing conductor
Number of socket outlets	5 two-pole socket outlets with earthing pin, 10A/250V
Switch	illuminated double pole mains switch
Housing	made of self-extinguishing plastic
Dimensions	315x56x44mm
Weight (excluding signal cables)	0,4kg

The manufacturer reserves the right to change the technical parameters of the device, resulting from technological progress.
ATTENTION! The technical data define the maximum values of surges against which the device protects.