


acar

X5 plus




Glossy surface

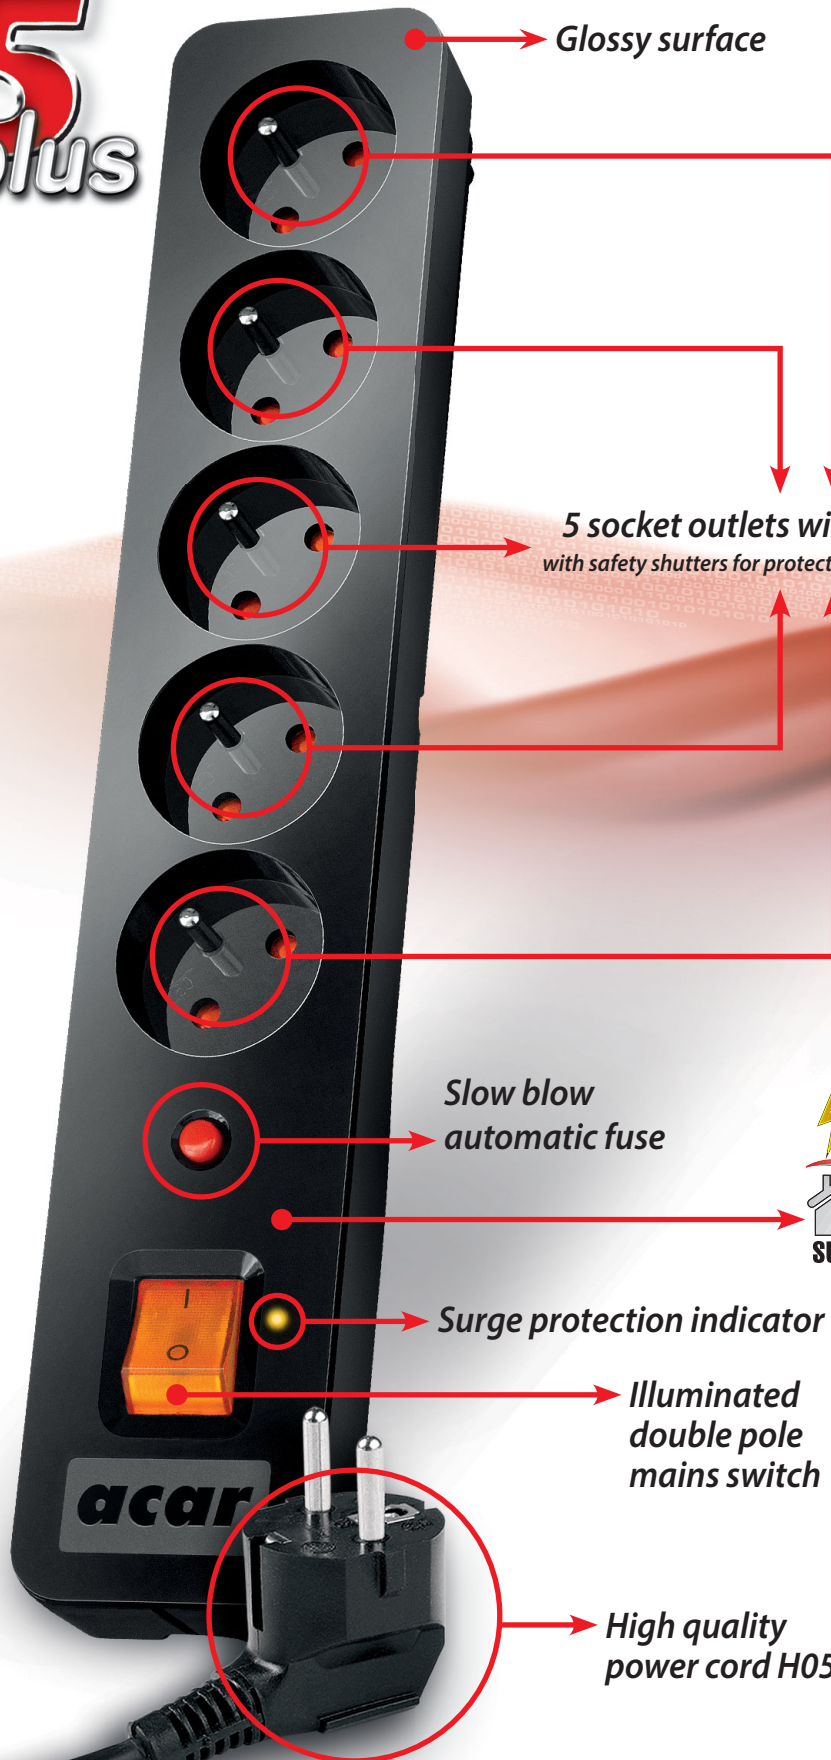

5 socket outlets with earthing pin
with safety shutters for protection against electric shock

Slow blow
automatic fuse



Surge protection indicator

Illuminated
double pole
mains switch

High quality
power cord H05VV-F

**acar**[®]

acar X5 plus

Surge protective power strip
 + enhanced surge energy absorption
 + surge protection indicator



5 SOCKET OUTLETS WITH EARTHING PIN

AUTOMATIC FUSE

SOCKET OUTLETS SAFE FOR CHILDREN

SURGE PROTECTION

ILLUMINATED DOUBLE POLE MAINS SWITCH

SURGE PROTECTION INDICATOR

3 AVAILABLE COLOUR VARIANTS

AVAILABLE POWER CORD LENGTHS: 1.5m, 3m, 5m

The **acar X5 plus** is one of the latest surge protective power strip sold under the brand name acar. Reliability, efficient construction solutions and modern design allow us to provide a 5-year warranty for the device. Unlike the basic version, the **acar X5 plus** is enriched with enhanced surge protection and with the indicator of its proper operation. The glossy surface emphasizes the uniqueness and fresh look of the product, making it visually eye-catching. Five socket outlets and small size make the power strip useful both at home and in the office. The automatic fuse provides practically maintenance-free operation. High efficiency and attractive appearance predispose the power strip to become the basic surge protection necessary everywhere. The mounting brackets are available from dealers.

ILLUMINATED DOUBLE POLE MAINS SWITCH AND SURGE PROTECTION INDICATOR



SLOW BLOW AUTOMATIC FUSE



5 SOCKETS 10A WITH EARTHING PIN AND SAFETY SHUTTERS



FOUR POSSIBLE WAYS OF POWER CABLE ROUTING AND OPTIONAL MOUNTING BRACKETS



Technical data: **acar X5 plus**

Maximum load	P_{MAX} 2300W
Nominal voltage U_N	230V
Nominal frequency	50Hz
Nominal load current	$\Sigma I_N = 10A$ MAX
Surge protection response time	<25ns
Maximum voltage U_C	250V 50Hz
Protection level U_p	$\leq 1.3kV$
Nominal discharge current i_N	2kA (L/N) – 8/20 μs
Maximum discharge current i_{MAX}	10kA (L/N) – 8/20 μs (type 2)
Fuses	1 automatic fuse, slow blow 10A/250V
Anti-shock protection system	earthing pins connected to the protective earthing conductor
Number of socket outlets	5 two-pole socket outlets with earthing pin, 10A/250V
Switch	illuminated double pole mains switch
Housing	made of self-extinguishing plastic
Dimensions	315x56x47mm
Weight	0.4kg

The manufacturer reserves the right to change the technical parameters of the device, resulting from technological progress.
 ATTENTION! The technical data define the maximum values of surges against which the device protects.