










acar X5 Schuko

Surge protective power strip

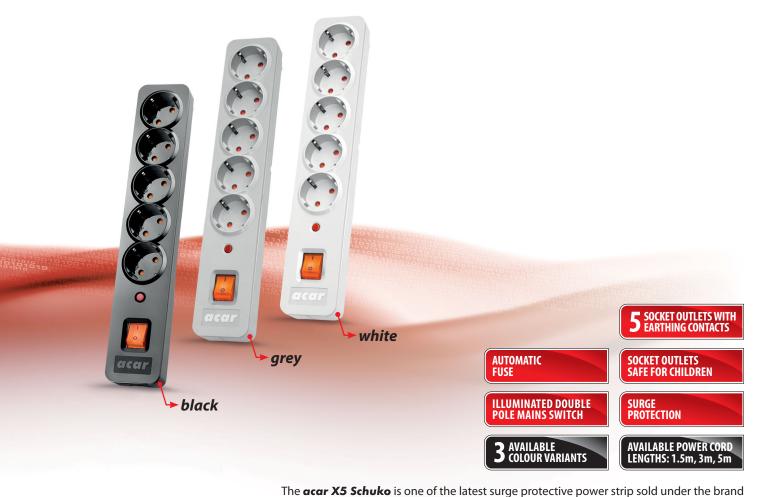

ILLUMINATED DOUBLE POLE MAINS SWITCH AND SLOW BLOW AUTOMATIC FUSE



SURGE PROTECTION

5 SOCKETS 10A WITH EARTHING CONTACTS AND SAFETY SHUT-TERS

FOUR POSSIBLE
WAYS OF POWER
CABLE ROUTING AND
OPTIONAL MOUNTING
BRACKETS





name acar. Reliability, efficient construction solutions and modern design allow us to provide a 5-year warranty for the **acar X5 Schuko**. The glossy surface emphasizes the uniqueness and fresh look of the product, making it visually eye-catching. Five Schuko socket outlets and small size make the power strip useful both at home and in the office. The automatic fuse provides practically maintenance-free operation. High efficiency and attractive appearance predispose the power strip to become the basic surge protection necessary everywhere. The mounting brackets are available from dealers.

Technical data: acar X5 Schuko

Maximum load	P _{MAX} 2300W
Nominal voltage U _N	230V
Nominal frequency	50Hz
Nominal load current	$\Sigma I_N = 10A \text{ MAX}$
Surge protection response time	<25ns
Maximum voltage U _C	250V 50Hz
Protection level U _P	≤1.3kV
Nominal discharge current i _N	2kA (L/N) – 8/20μs
Maximum discharge current i _{MAX}	6.5kA (L/N) – 8/20μs
Fuses	1 automatic fuse, slow blow 10A/250V
Anti-shock protection system	earthing contacts connected to the protective earthing conductor
Number of socket outlets	5 two-pole socket outlets with earthing contacts, 10A/250V
Switch	illuminated double pole mains switch
Housing	made of self-extinguishing plastic
Dimensions	315x56x47mm
Weight	0.4kg

The manufacturer reserves the right to change the technical parameters of the device, resulting from technological progress. ATTENTION! The technical data define the maximum values of surges against which the device protects.