


mini axon A310

Surge protective adapter







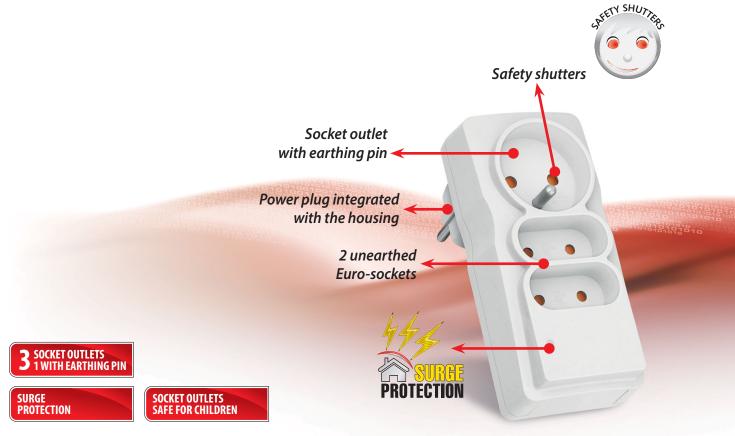

The *mini axon A310* is a handy surge protector for three appliances. Surge protection system, ergonomic design and compact size make the *mini axon A310* enables its versatile use both at home and in the office, protecting computers, printers, monitors and scanners, as well as Audio & Video equipment. Despite the reduced dimensions, the device features the highest surge protection parameters. In addition, the *mini axon A310* is equipped with shutters to protect against electric shock. The *mini axon A310* features one socket outlet with earthing and 2 unearthed Euro-sockets.

Technical data: mini axon A310

Maximum load	P _{MAX} 2300W
Nominal voltage U _N	230V
Nominal frequency	50Hz
Nominal load current	$\Sigma I_N = 10A \text{ MAX}$
Surge protection response time	<25ns
Maximum voltage U _C	250V 50Hz
Protection level U _P	≤1.3kV
Nominal discharge current i _N	2kA (L/N) – 8/20μs
Maximum discharge current i _{MAX}	6.5kA (L/N) – 8/20µs
Anti-shock protection system	earthing pins connected to the protective earthing conductor
Number of socket outlets	1 two-pole socket outlets with earthing pin, 10A/250V 2 two-pole socket outlets without earthing, 2.5A/250V
Housing	made of self-extinguishing plastic
Dimensions	122x55x75mm
Weight	0.12kg

SOCKET OUTLET 10A WITH EARTHING PIN AND SAFETY SHUTTERS



2 UNEARTHED EURO SOCKETS 2,5A WITH SAFETY SHUTTERS

The manufacturer reserves the right to change the technical parameters of the device, resulting from technological progress. ATTENTION! The technical data define the maximum values of surges against which the device protects.